

Installation of the multi-disciplinary VENUS observatory at the Ryukyu Trench using Guam-Okinawa geophysical submarine cable (GOGC : former TPC-2 cable)

Junzo KASAHARA*¹ Katsuyoshi KAWAGUCHI*² Ryoichi IWASE*²
Yuichi SHIRASAKI*³ Jun'ichi KOJIMA *⁴ Tadashi NAKATSUKA*⁵

A multi-disciplinary VENUS (Versatile Eco-monitoring Network by Undersea-cable System) observatory, which equips seven geophysical instrument groups, was installed at the depth of 2,170 meters on the slope of the Ryukyu Trench. Prior to the installation of the VENUS multi-disciplinary ocean bottom observatory (MDOBO), an ocean-bottom telemetry system, which has functions to supply electrical power to the MDOBO, and the submarine coaxial cable were installed at ocean bottom. The installation of the multi-disciplinary ocean bottom observatory was done by use of deep-towing unit and ROV *Kaiko-10K*. During the period of August-September, 1999, seven instrument groups of MDOBO were deployed at the target position, at 80-1000 meter distances from the telemetry system, with several meters allowances using a deep-towing unit. To install the instrument at the exact location, the mother ship of deep-towing unit was precisely navigated. The extension cables were also dropped from the deep-towing unit. The ROV *Kaiko-10K* extended multi-conductor extension cables from instrument units towards the ocean-bottom telemetry system and connected them to undersea mateable connectors on the junction box. The MDOBO collected one and half month records. Some useful data were observed since the installation.

Keywords : submarine cable, multi-disciplinary ocean bottom observatory, broadband seismometer, ocean bottom environment, coaxial submarine cable, ROV, deep-towing unit.

* 1 Earthquake Research Institute, University of Tokyo
* 2 JAMSTEC
* 3 Kokusai Marine Engineering Corp.,
* 4 KDDI Research Laboratory
* 5 Geological Survey of Japan

1. Introduction

During several decades, intense investigations at the seafloor have been carried out on regions such as subduction zones, spreading area and mid-ocean, and these results greatly improved the detailed geophysical images on the Earth. The main purposes of these investigations were to know the geophysical phenomena on global scale. On the other hand, it has been widely recognized that studies of temporal variations are also equally important since geophysical phenomena have episodic natures and some phenomena such as earthquake occurrence or submarine volcanism require real-time observation. According to these demands, the long duration observation and the real-time geophysical observation on the deep-sea floor are eagerly requested in viewpoint of environmental monitoring at deep-sea and earthquake hazards. One of the best technologies to achieve real time and long-time observations is the use of submarine cables, which are based on well-developed technology and have proven field history in telecommunication. Although fiber-optic submarine cables are very advanced and reliable technology, the use of new fiber-optic submarine cables is costly. Another kind of submarine cable is the coaxial cable, which can provide electrical power and real-time telemetry similar to fiber-optic cables. Although many submarine cable OBS's have been deployed around the Japanese coast during the past two decades (e.g., Kinoshita et al., 1997), each system required a huge investment and therefore, the construction of similar system at a far distance from the shore would not be easy. Reusing coaxial submarine cable resources to construct real-time geophysical observatories on the deep-sea floor can be realized with high reliability and could be an alternative way for this purpose (e.g., Nagumo and Walker, 1989; Kasahara et al., 1995). By the use of old coaxial submarine cable TPC-1 (Trans Pacific Cable-1), an ocean bottom seismometer was installed on the forearc slope of the Izu-Bonin Trench by the GeO-TOC project, showing effectiveness to realize real-time ocean bottom measurement by reasonable cost. (Kasahara et al., 1998a,b) (Fig. 1). Although this deployment was based on well-developed method in the submarine cable works, it is difficult to add some branches from the main cable if multi-sensors are required within nearby-locations.

The TPC-2 submarine cable was the second Japan-

US submarine cable constructed in 1976 and it terminated its long commercial service in 1994 due to the replacement by a new generation cable. A section of the TPC-2 between Okinawa Island, Japan and Guam Island was obtained by the ERI (Earthquake Research Institute), University of Tokyo in 1996. In 1995, the VENUS (Versatile Eco-monitoring Network by Undersea-cable System) project was created to develop a new multi-disciplinary geophysical station using the TPC-2 cable (Guam Okinawa Geophysical Cable; hereafter GOGC) (Kasahara et al., 2000a)(Fig. 1). The GOGC passes geophysically important regions and it is routed from the Mariana Trough to the mid-Philippine Sea plate to the Ryukyu Trench. These areas contain seismically very active subduction zone and a rifting back-arc basin.

The objectives of the VENUS project are to construct a multi-disciplinary ocean-bottom observatory (hereafter MDOBO) to study deep-sea environmental changes due to the subduction of the Philippine Sea plate at the Ryukyu Trench. A MDOBO was installed at the Ryukyu Trench during August-October, 1999. This paper describes the fieldwork for the installation of the MDOBO and associated engineering works.

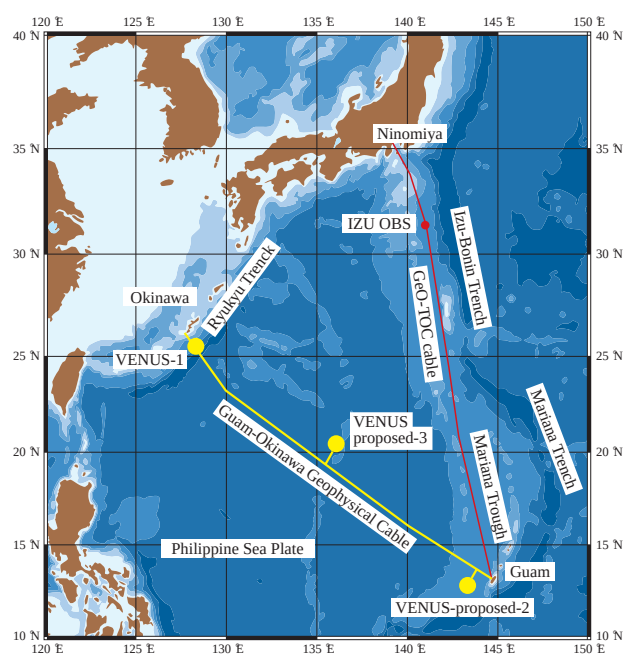


Fig. 1 Map showing GOGC (Guam-Okinawa Geophysical Cable; former TPC-2) cable and GeO-TOC cable (former TPC-1). The VENUS-1 is the current MDOBO at the forearc slope of the Ryukyu Trench.

2. VENUS System Description

Since the details of the VENUS system are described in Kasahara et al (2000a), the outline of the system is only described in this paper. The cable length of the GOGC is 2,527 km. The TPC-2 (current GOGC) used 1.5"-diameter coaxial cables (SF system) and had 845 voice channels (KDD, 1976). The +1,080 V DC from Okinawa and -1,080 V DC from Guam were supplied to the cables at 136 mA constant current during the commercial use. Voices were transmitted from one end to the other as analog signals by use of 3 kHz carrier band superposed on the high voltage DC. To convert the TPC-2 to a geophysical tool, the cable system was greatly modified on the power supply, the method of communication, and the configuration of the main cable. The VENUS system comprises the MDOBO, the ocean-bottom telemetry system (hereafter OBTS), submarine coaxial cables (hereafter SMCC) of GOGC, and land equipment (Fig. 2). The MDOBO comprises seven

bottom sensor groups with one land-based electrical potential measurement system (Fig. 3) developed by six institutions¹. The OBTS comprises a data-coupling unit (hereafter DCU), a data-telemetry unit (hereafter DTU) and a junction box (hereafter JBX) developed by the KDD research Laboratory. The methods for deploymental works were developed by the joint efforts of the KDD research Laboratory and JAMSTEC (Japan Marine Science and Technology Center).

The DCU generates 100V DC using 3,000 V and separates the high-voltage DC component from high-frequency carriers, and again mixes the high-frequency carrier with the DC component (Kojima et al., 2000a). The DTU multiplexes multi-component data by TDM (Time Division Multiplexing) and sends them to shore using a 240-kHz-carrier bandwidth. Each instrument of the MDOBO uses 24 V DC generated by the DTU. The transmission rate for the multiplexed data is 96 kbps, which is shared by seven instrument groups. For exam-

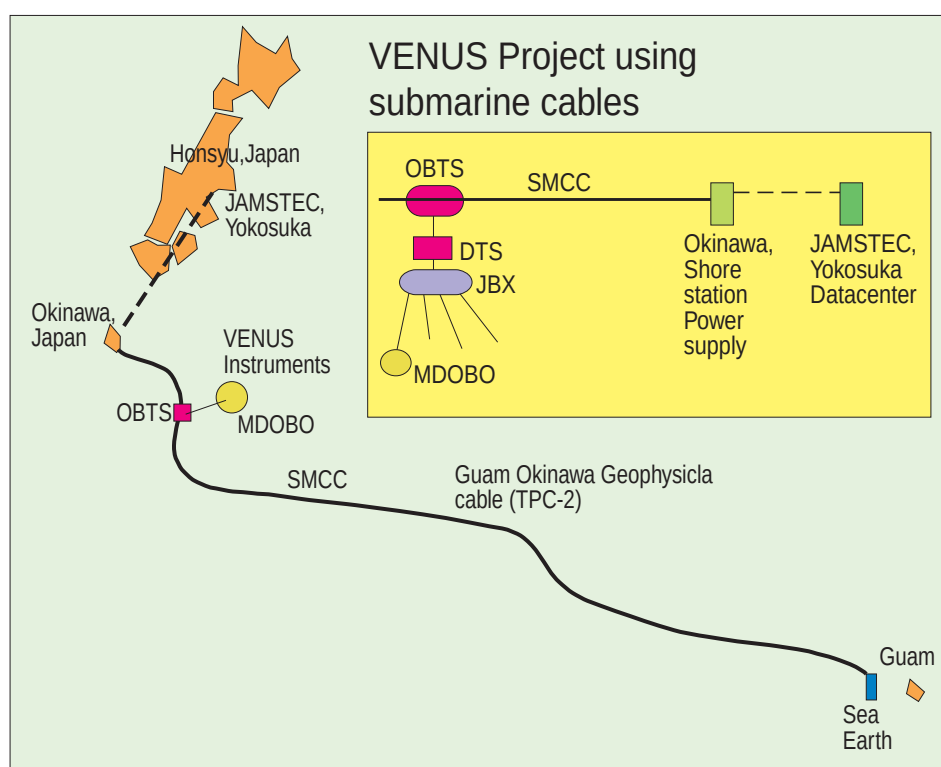


Fig. 2 The VENUS system from the MDOBO to the data center in Yokosuka. MDOBO: Multi-Disciplinary Ocean-Bottom Observatory; JBX: Junction BoX; DTS: Data Telemetry System; OBTS: Ocean Bottom Telemetry System and SMCC: Sub-Marine Coaxial Cable.

¹ Six institutions (Earthquake Research Institute, JAMSTEC, Hydrographic Department Japan, Geological Survey of Japan, Japan Meteorological Agency and Electronic Technical laboratory) jointly worked.

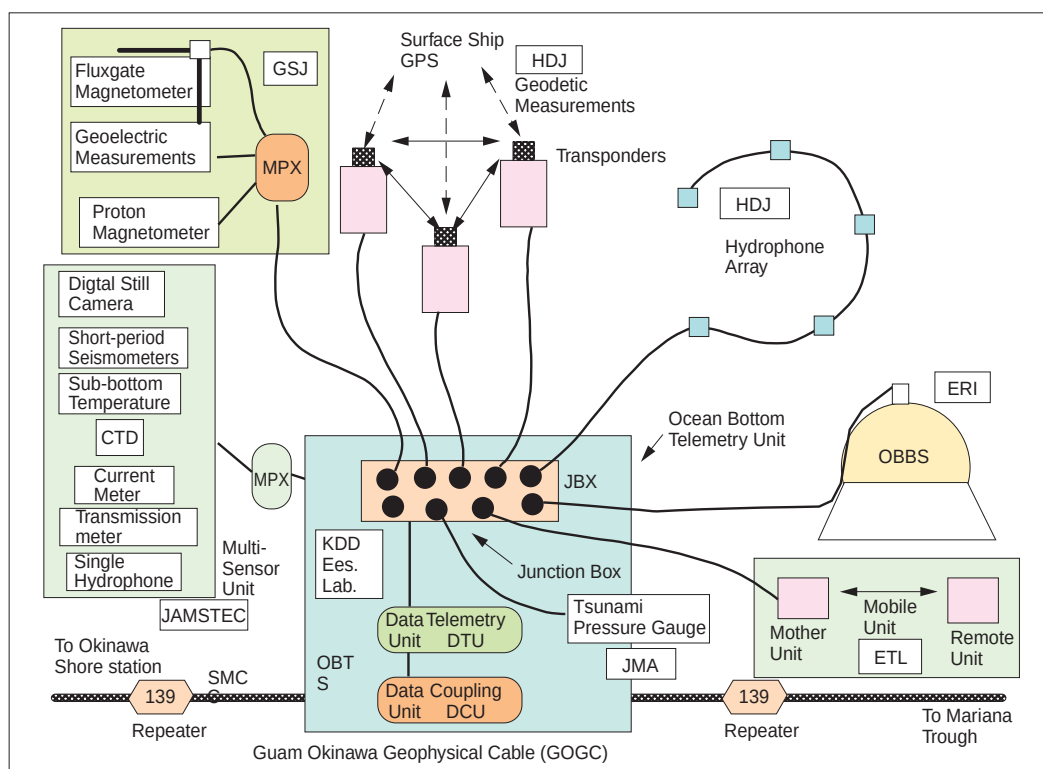


Fig. 3 The VENUS ocean bottom system (SMCC, DCU, DTU, JBX and MDOBO) developed by multi-institutions. Abbreviations are the same as the ones in Fig. 2.

ple, the broadband seismometer uses 19.2 kbps and 9.6 kbps from bottom to land and from land to bottom, respectively. If the instrument does not work correctly, users can shut down a malfunctioning unit remotely from a land base. Each instrument of the MDOBO and the JBX was connected by an eight-conductor extension cable, which supplies 24 VDC and command signals to an instrument. The data from an instrument transmitted to the JBX through the extension cable by the RS422 protocol. The JBX has nine so-called "ROV (Remotely Operated Vehicle) undersea mateable connectors". The ROV connectors allow units to be plugged in and unplugged on the ocean floor with the assistance of a manned submersible or an ROV.

3. Deployment of whole bottom units

3.1. Installation of ocean bottom telemetry system

The target site for the MDOBO was selected at $25^{\circ} 44'N$ and $128^{\circ} 02.5'E$ at a water depth of 2,200 meters, which is halfway between two repeaters, R139 and R138. The route of the GOGC cables was identified at more than 20 locations by the deep-tow camera of R/V

Yokosuka (YK98-02-Leg3) in 1998 (Kasahara et al., 2000c). We, however, encountered unsuccessful field trials twice in 1998. During the submersible *Shinkai 6500* dive #411 (YK98-04) in March 1998, the main cable was cut at a depth of 2,205 m. The cable was found on the ocean floor with a thin sediment cover. During dive #412, the cable was grappled by the cable gripper, which was connected to a retrieval rope with a length of 3,200m. Retrieval of the main cable failed with the cable gripper slipping-off the main cable. The holding strength of the cable gripper seemed critical for the tension during retrieval work. During deployment of the bottom units in November 1998 using R/V *Yokosuka (KR-98-11 Leg 1)* and C/S *KDD Pacific Link*, we obtained 12 hour-long data from the tsunami gauge and inclinometers although we encountered problems on a connector and a connecting cable. This deployment proved that data from bottom sensors and commands from land were correctly transmitted to land and to bottom, respectively.

After the careful examination on bottom units, components, and deployment method, the OBTS was suc-

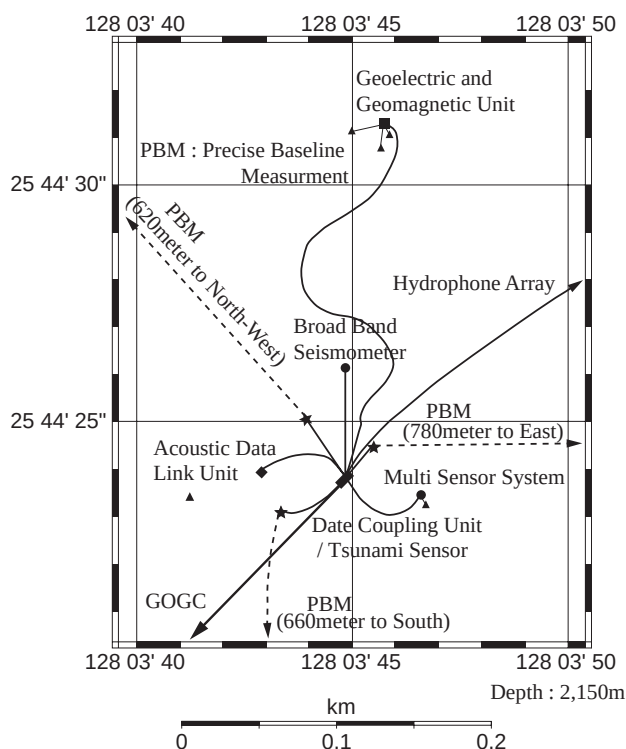


Fig. 4 Geographical arrangements for instruments of MDOBO, DCU and SMCC at the VENUS site.

successfully installed at the location of 25°44.397' N, 128°03.748' E at the depth of 2,157 meters by the cable ship *C/S Kuroshio-Maru* on August 29, 1999. The location of the OBTS is almost the same as the target site (Fig. 4). At the same time, the hydrophone array and the tsunami gauge were also deployed to the ocean bottom. The tsunami gauge was installed in the same frame with OBTS and the hydrophone array was connected to the OBTS in series. We confirmed that the data from the OBTS, the tsunami gauge and the hydrophone array were correctly transmitted to JAMSTEC.

3.2. Deployment of instruments by deep-towing unit

In middle of September 1999, five instrument sets of the MDOBO other than the hydrophone array and the tsunami gauge were deployed by the deep-towing unit on board of the *R/V Kaiyo* of JAMSTEC (*KH99-07*), which equipped 6000m-long tethered cables, and two TV cameras, one for watching the bottom and one for watching the ahead. The MDOBO instruments occupied the area with an approximately 1-km radius around the telemetry system as shown in Fig. 4. The positions of instruments were decided by considering the geophysical

importance and easiness of deployment. The deep-towing unit also had two releases systems, which could be operated from the *Kaiyo*. It was thought that a precise navigation of deep-towing unit was extremely difficult task because of difficulty to know the precise distance between vehicle and the target, and maneuver the vehicle directly from the mother ship *R/V Kaiyo*. It, however, was carried out with accuracy of approximately three meters by use of ROV homers, which could tell us the off-center and the distance to the target. The *Kaiyo* was also navigated by watching the positions of the deep-towing unit and targets on the video-plotter screen and the deep-towing unit was precisely controlled by *Kaiyo*'s speed and heading with several minutes time lags.


For the ocean bottom broad-band seismometer (OBBS), the multi-conductor extension cable with 100m-long on the wooden reel and eight lead weights with 20 kg each were attached to bottom of the deep-towing unit frame, and they were released from the deep-towing unit by one by one (25-44.436°N, 128-03.748°E, 2150m). The OBBS unit was placed at 80 meter north of the bottom telemetry system, within 5-meter distance allowance using a deep-towing unit (Fig. 5). The longest extension cables were 1,000 meters long for the three precise-baseline measurement systems (PBMS) and these long cables were extended toward the JBX by the deep-towing unit after the detachment of the measurement unit. The final positions of the PBMS cable drums were less than 40 meters, which were just suitable for the length of the second stage extension cables.

3.3. Seafloor operations by ROV KAIKO-10K


We also used the ROV *Kaiko-10K*, which was an ROV with capability to dive down to 12,000m deep. The *Kaiko-10K* system comprises a tethered launcher and a shuttle vehicle with 200 meters-long extension cable. The *Kaiko* had missions to find the instruments, extend seven sets of extension cables and connect the undersea mateable connectors (so called ROV connector) of the extension cables and the JBX. The *Kaiko* dived to the target site in the end of September (*KR99-09; dive #128*)(Figs. 6-8). During the *Kaiko*-operation, the launcher was kept at 100 meters above the center of the seafloor operation and the shuttle part reached to the seafloor. All the instruments were found to sit correctly at the seafloor. Although each instrument required spe-




広帯域地震計

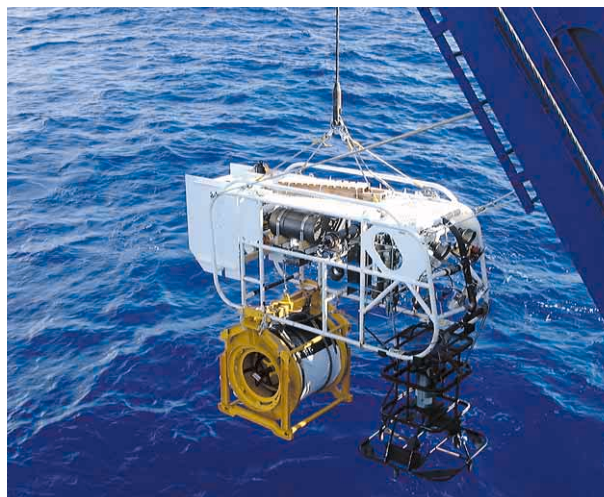


音響測距装置

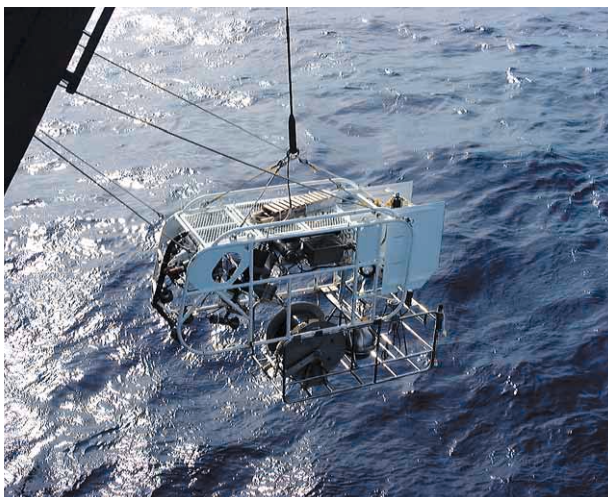

臨時観測装置 (基幹部)

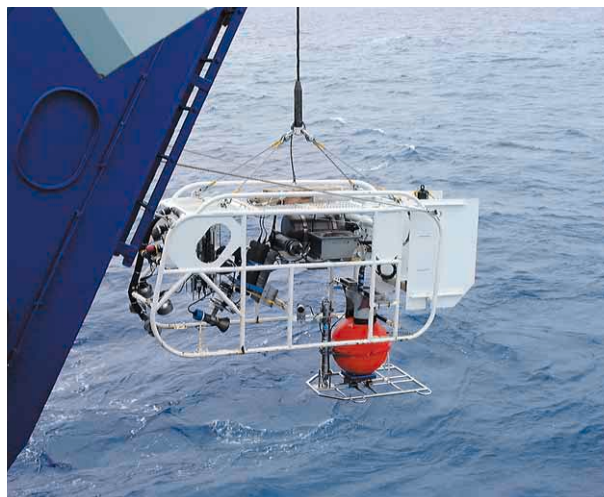

臨時観測装置 (移動部)

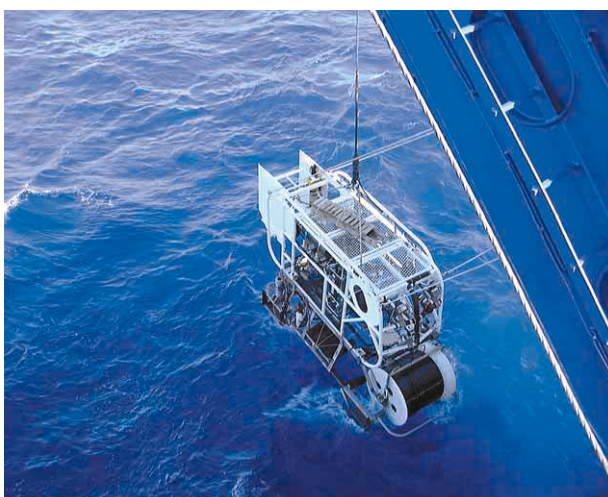

地磁気・電場観測装置



同左 (着底時)

Fig. 5 Photographs during the deployment of MOBO instruments by using the deep-towing unit. Each instrument was placed below the deep-towing unit. From top-left to bottom-right: OBBS (Ocean Bottom Broad-Band Seismometer), PBMS (Precise Baseline Measurement System), mobile receiving unit, mobile transmitting unit, geoelectric-geomagnetic instrument, and one touched at the ocean bottom.



Fig. 6 Kaiko-10K manipulator operation during the penetration of an ROV male connector into the ROV female connector on the JBX.

cific works, each ROV-dive-time was sufficient for the necessary works for each instrument set. Most of instruments except the tsunami gauge and the hydrophone array required cable extension works. The *Kaiko* uncoiled the multi-conductor extension cables from each reel and approached slowly to the OBTS. The longest extension cable was 300 meters for the geoelectric and geomagnetic system. The tight and slack situation during the cable extension works was the most difficult one among the *Kaiko* undersea operations. At the OBTS, the manipulators of the *Kaiko* were used to penetrate the male ROV connectors into the receptacles on the JBX. Some amount of pelagic sediment was found in the ROV connector cover and it was removed by several operations of plug in-plug out of the ROV connector.

A shore station is located in Okinawa. In order to examine the successfulness of each operation, the DC power of 2,900V and 135 mA was supplied to the SMCC, the OBTS and the MDOBO from Okinawa while the *Kaiko* stayed in front of the OBTS. By the power supply to the whole system, we confirmed the correct operation of each instrument. All necessary undersea operations were finished before early October 1999.

The shore-receiving unit (SRU) demodulated signals and sent them to Yokosuka, Japan, using two 64-kbps commercial telephone lines. Some controls of instruments such as level adjustment and clamp-unclamp of the seismic unit were done from Yokosuka. Timing by

GPS clock was supplied to each instrument from the shore station. Whole data from the bottom were monitored at Yokosuka. Data from ocean bottom instruments were stored in the data storage at the JAMSTEC.

Some problems arose at two and half months after the deployment of the OBTS. On November 21, 1999, the bottom system was abruptly down. The problem seemed on 24V DC converter in the data-telemetry unit. By two diving cruises of the ROV *Dolphine 3K*, which is the 3,000m-class ROV, and the *Kaiko-10K*, it was found that there were a trace of corrosion on the pressure case of the data-telemetry unit and insufficient insulations on instruments and the OBTS (Kasahara, 2000). The problems seem to be generated during the deployment due to weakness on extension cables and some other causes.

In January 2001, the OBTS, tsunami gauge and the hydrophone array were retrieved to analyze the cause of malfunctioning of the VENUS system using *C/S Kouki-Maru* with assistance of KDDI Co. Ltd. The visual inspection of the OBTS showed serious corrosions on the titanium pressure case of the DTU in contrast to no corrosions on the DCU and the JBX. In addition to some defects on the OBTS, the hydrophone array had some damages on connectors between each sensor and the main electrical cable. It seems that the electrical insulation in such systems was damaged by unknown reasons. The more detail causes will be analyzed by the examination of the retrieved system.



分岐装置・津波計



同左（観測機器接続後）




広帯域地震計



地磁気・電場観測装置



音響測距装置（本体）

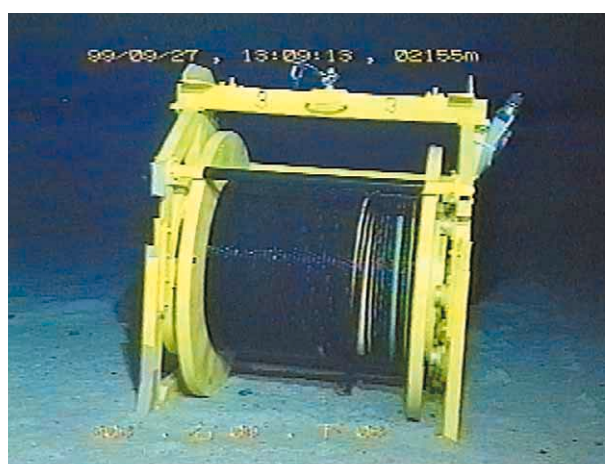


同左（ケーブル展張用ポビン）


Fig. 7 (a) Photographs of the instruments at the ocean-bottom.
From top-left to bottom-right. OBTS with tsunami gauge, DCU, DTU and JBX; one at far-view; OBBS; Geoelectric-geomagnetic instrument; PBMD and multi-conductor extension cable on the drum.



臨時観測装置（基幹部）

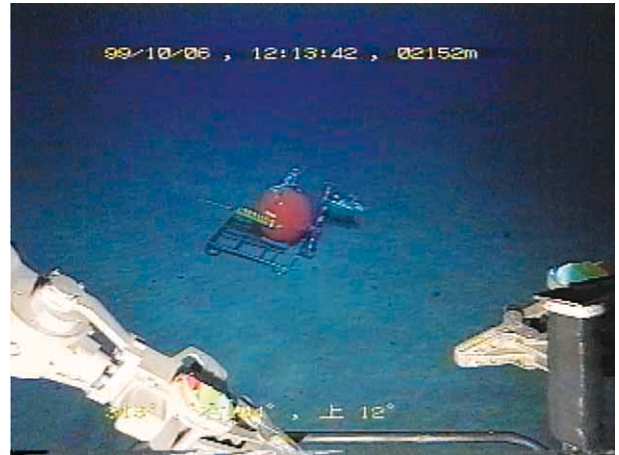

同左（移動部）

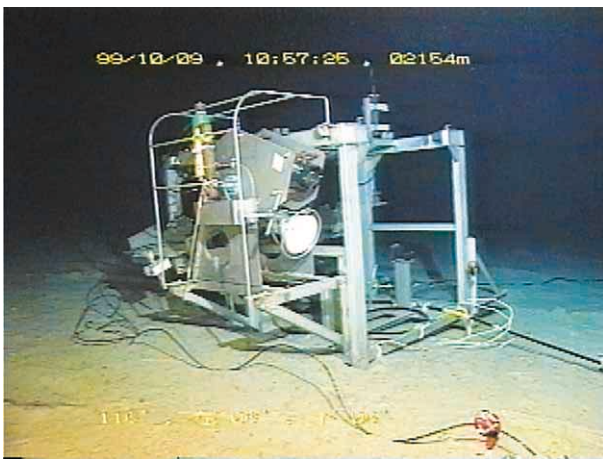

マルチセンサ深海底環境変動観測装置



ハイドロフォンアレー



「かいこう」による分岐装置へのコネクタ接続の様子

Fig. 7 (b) Photographs of the ocean bottom instruments at the ocean-bottom.
From top-left to bottom-left: mobile receiving unit, mobile transmitting unit; multi-sensor system, hydrophone array and manipulator operation by the Kaiko-10K to connect undersea mateable connectors.



Fig. 8 OBTS after connecting the extension cables. Two cables at near-view are main submarine cables, one to Guam and the other to Okinawa. Top of the frame is the JBX.

4. PRELIMINARY RESULTS


Before November 20, 1999, the MDOBO collected one and half month records (Iitaka, et al., 2000; Iwase et al., 2000; Kasahara and Sato, 2000; Kasahara et al., 2000b; Katsumata et al., 2000; Nagaya, 2000; Nakatsuka et al., 2000; Watanabe, 2000). During the observation, an earthquake of $M_s = 6.1$, which is one of the major after-shocks of the Chichi Earthquake in Taiwan on September 21, 1999 ($M_s 7.7$), was observed by OBBS (Kasahara and Sato., 2000b)(Fig. 9). However, the noise level of OBBS at period of 100-200 seconds is surprisingly large due to strong influences from the infra-gravity waves currents (Webb, 1998), although it was estimated because the OBBS could not be buried in hard-rock base below the ocean bottom. Fig. 10 shows 40 days records of geomagnetic field and geo-electric field in comparison with land geomagnetic observation at Kakioka, JMA (Nakatsuka et al., 2000). The magnetic storm on Oct. 20, 1999 was shown at the lower figure of Fig. 10. Both geomagnetic and geo-electric showed simultaneous variation. The multi-sensor system showed that the bottom current was quite high (up to about 20 cm/s) and the bottom temperature change at depth of 2,200 meters was 0.1°C (Iwase et al., 2000)(Fig. 11). Although the pressure change measured by the tsunami gauge showed semi-diurnal variation suggesting large effects by tidal forces (Katsumada et al., 2000), the bottom temperature variation (Iwase et al., 2000) showed

diurnal changes, which are less effected by tidal forces. The PBLM instrument showed a possibility of crustal deformation measurement at the forearc basin with a few centimeters accuracy over 1km distance when measurements were corrected by bottom temperature variations (Nagaya, 2000). Those data are being analyzed.

5. CONCLUSIONS

The VENUS project was started in 1995 to develop a new concept for a submarine observatory. In this project, a geophysical MDOBO was developed using the decommissioned submarine cable GOGC. The system comprises MDOBO, OBTS, SMCC and land system. Digital data transmission using the coaxial analog cable is used. The OBTS and the seven instruments of the MDOBO were developed. In order to increase flexibility of installation and modification, the JBX with nine undersea mateable connectors was used, which enabled us to connect any instruments to a JBX in the deep sea. Several requirements arose due to the use of analog submarine cables, which were satisfied by mechanical and electronics designs. Using a cable ship, a deep-towing unit and an ROV, OBTS and MDOBO were successfully installed at a depth of 2,157 m in the Ryukyu Trench during the period between August and September 1999. All data were successfully transmitted to JAMSTEC data center and stored in the mass-storage. The seven instrument of the MDOBO collected one and half month records.

(a)

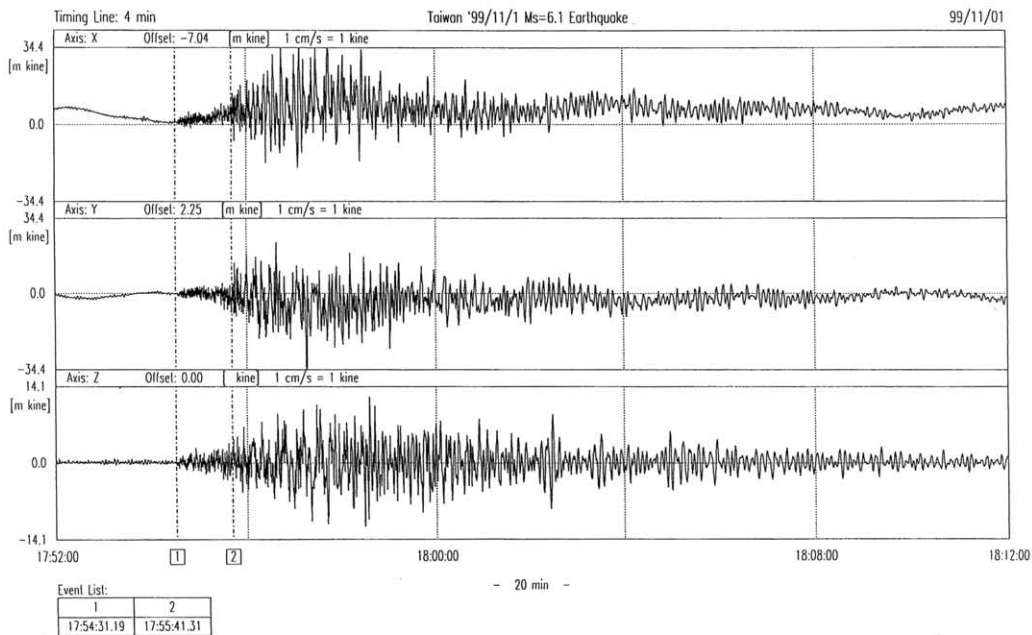

(b)

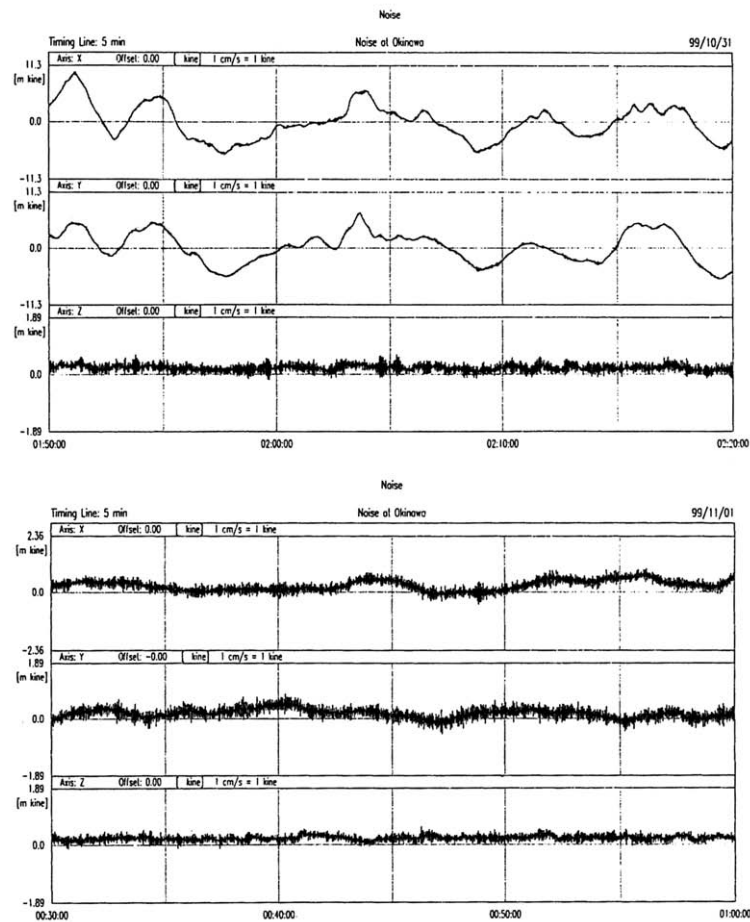


Fig. 9 (a), Example of OBBS records. Earthquakes of Taiwan with Ms=6.1. Top to Bottom: NS, EW and V components. Each vertical scale: $\pm 34.4 \times 10^{-3}$ cm/sec. Horizontal axis: 20 min. (b), Examples of ocean bottom noise observed by OBBS. 30-second records. Top (noisier example): vertical scale in $\pm 11.3 \times 10^{-3}$ cm/sec. Bottom (quieter example): vertical scale: in 2.36×10^{-3} cm/sec for N-S and E-W, and $\pm 1.89 \times 10^{-3}$ cm/sec. for V components.

10月8日～11月19日の地磁気電場連続観測データ

地磁気観測所(柿岡)での地磁気3成分

磁気嵐時の記録(1999・10・22～24)

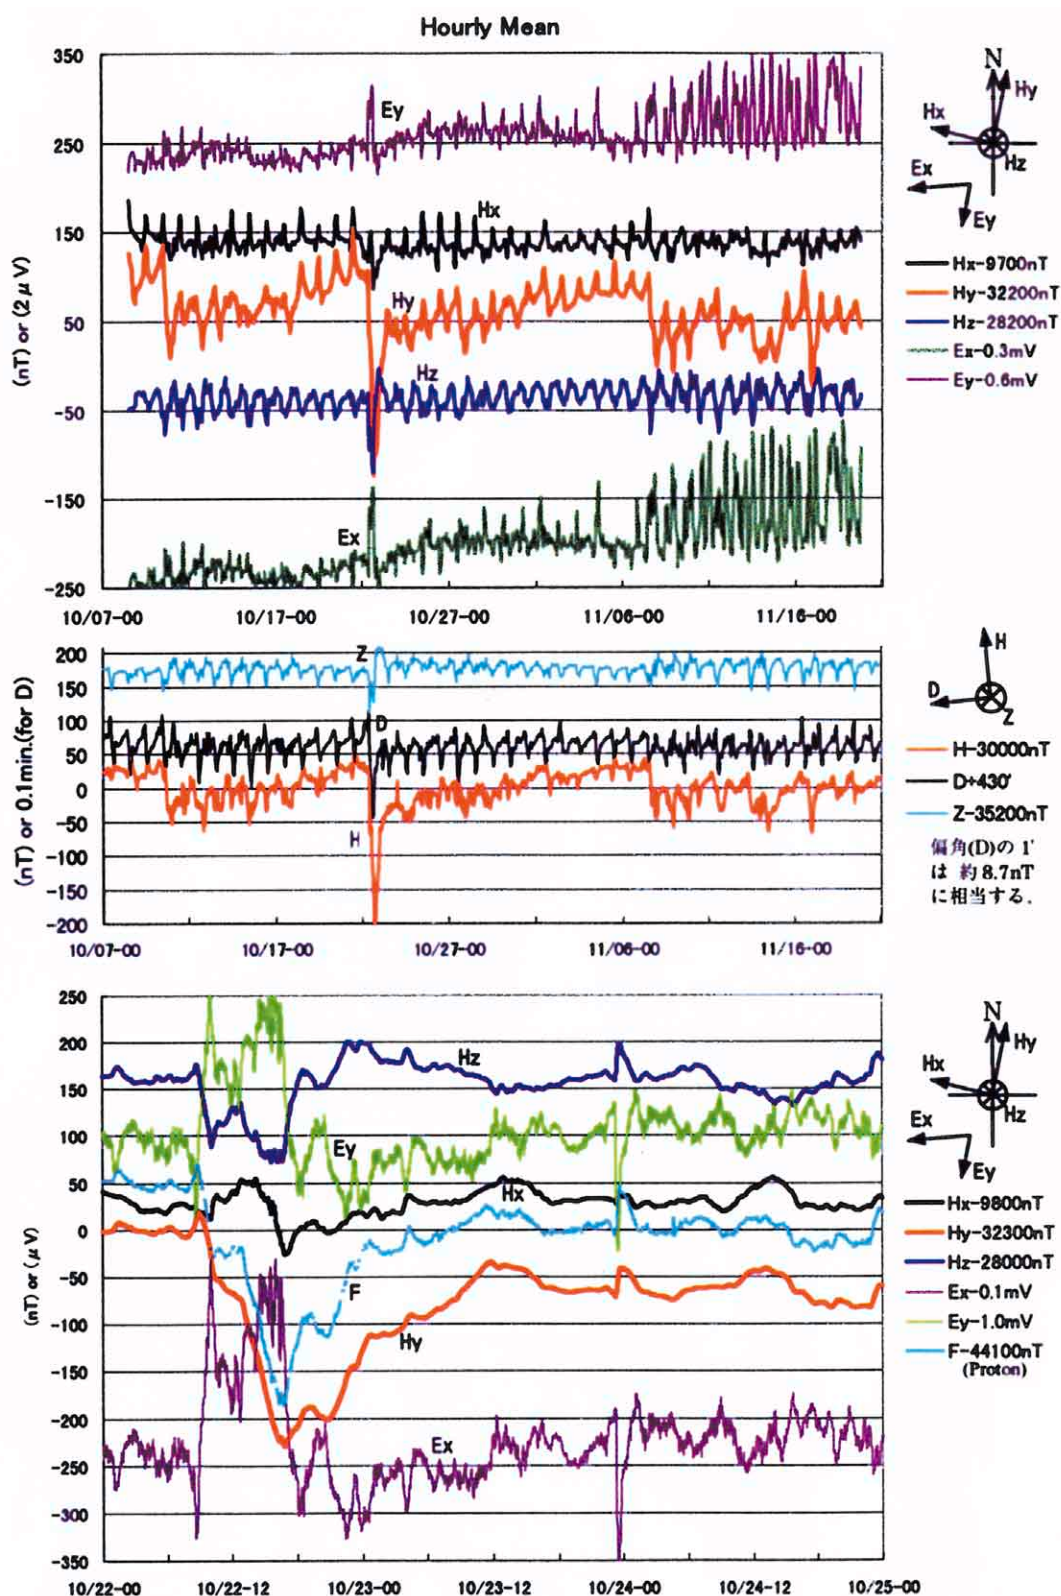


Fig. 10 Records of geo-magnetic and geo-electrical measurements. 42 days observation at the deep-sea site (top) and data from Kakioka magnetic observatory (middle) reveal a good correlation with a slight difference due to the difference in latitudes. Variation of the magnetic storm on Oct. 22, 1999 (JST) and its succeeding phenomena are shown on the bottom. The electrical field disturbance became larger after Nov. 6, 1999, which might indicate some unknown process related with the abrupt termination of the VENUS system.


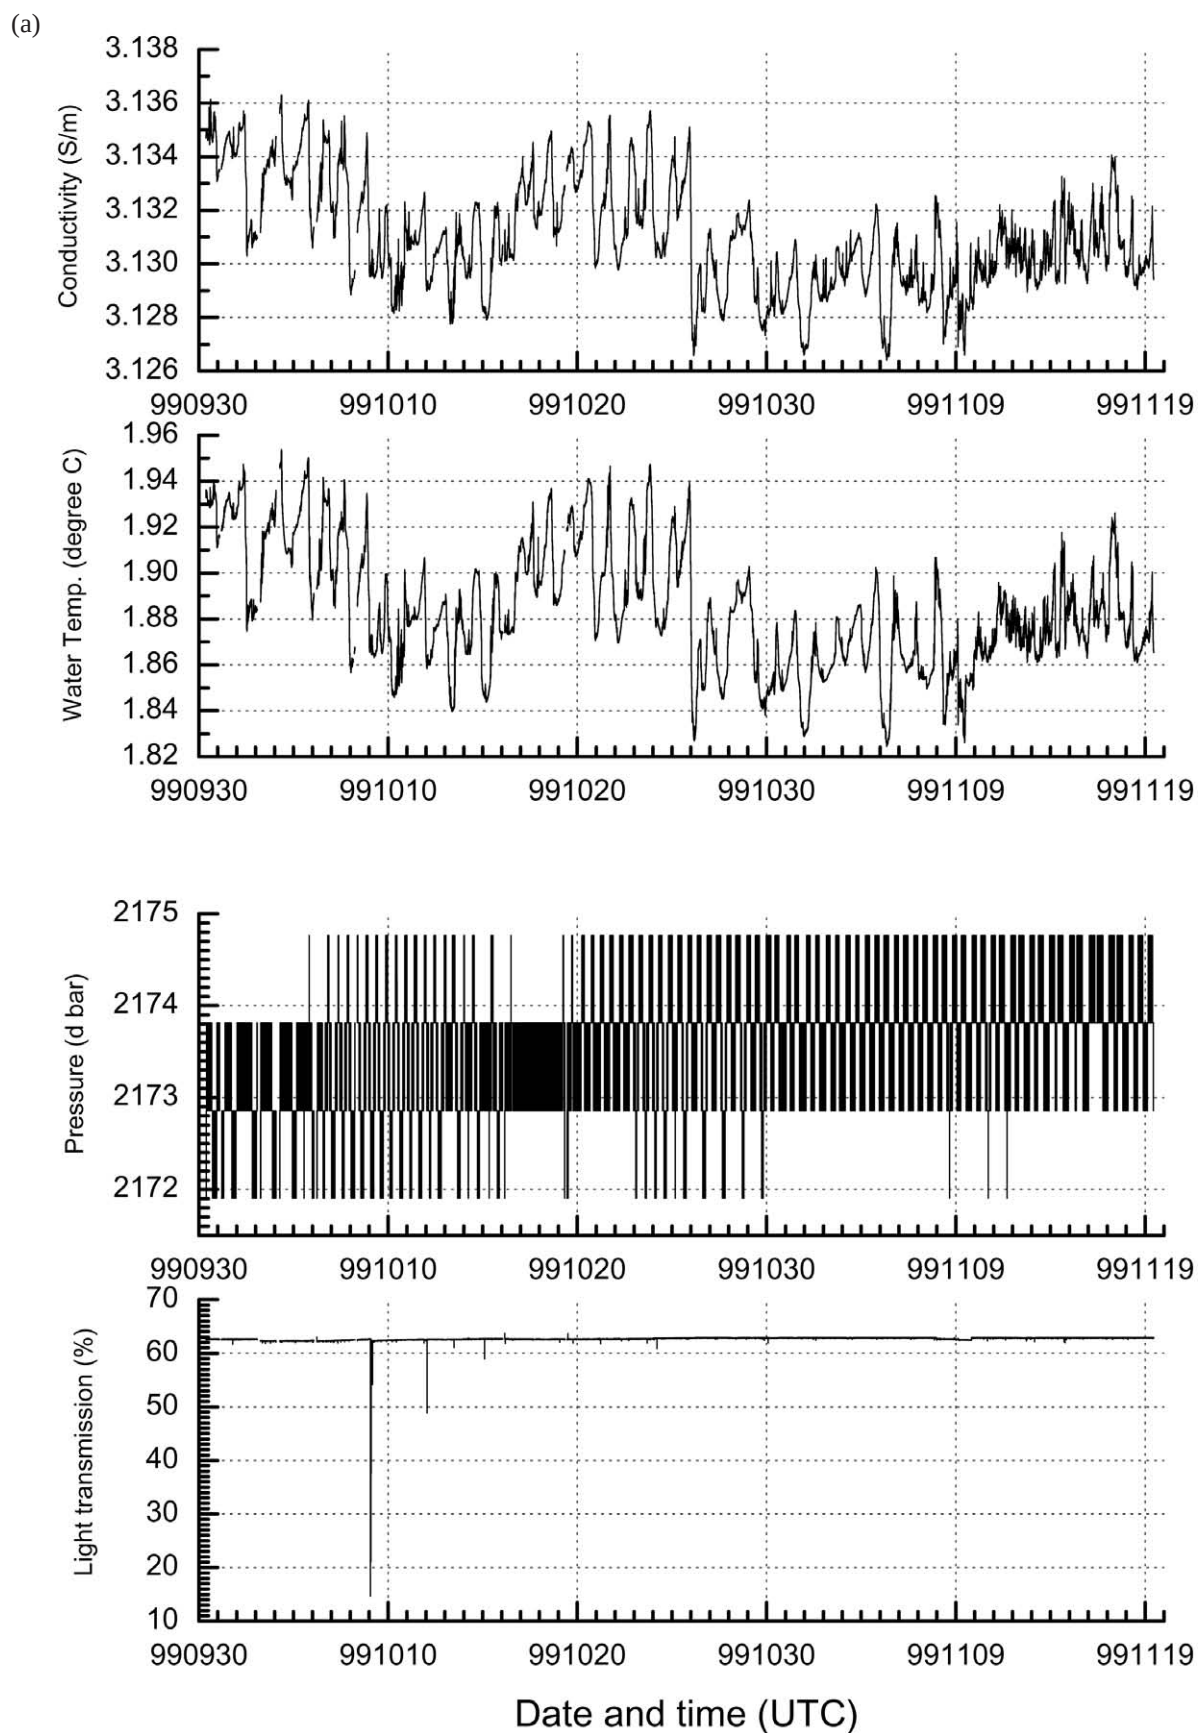


Fig. 11 Records obtained by the multi-sensor system.
 (a) Electrical conductivity, water temperature, water pressure and light transmission through water.

(b)

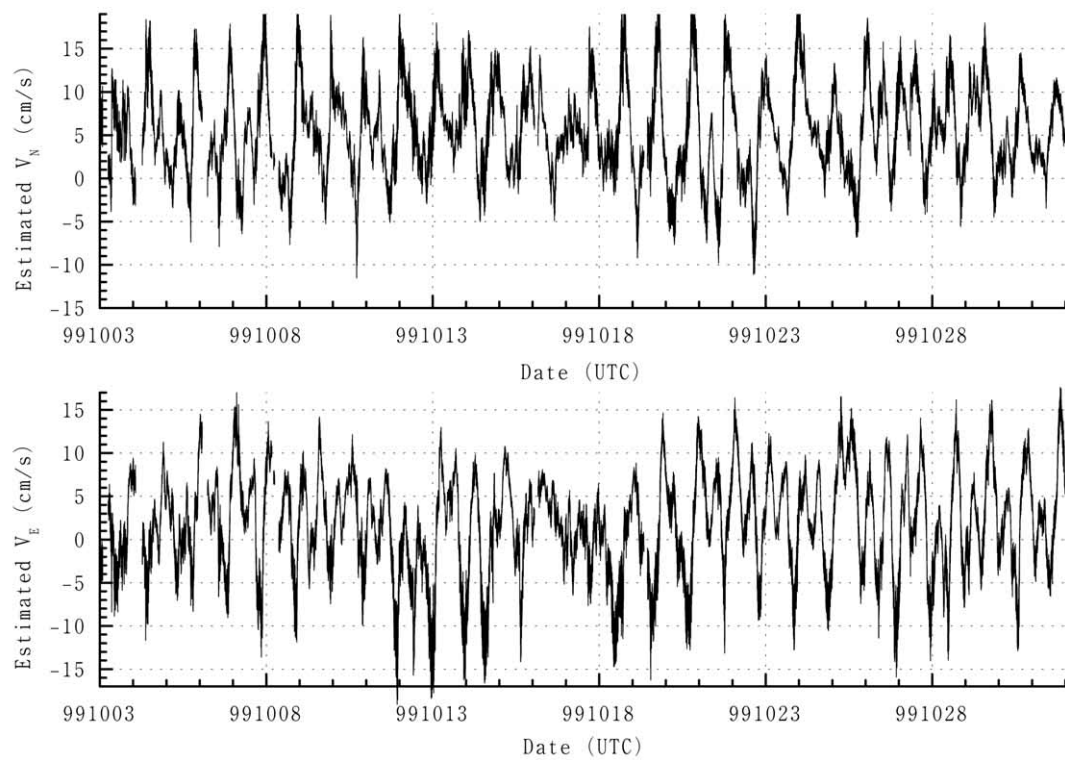

(c)

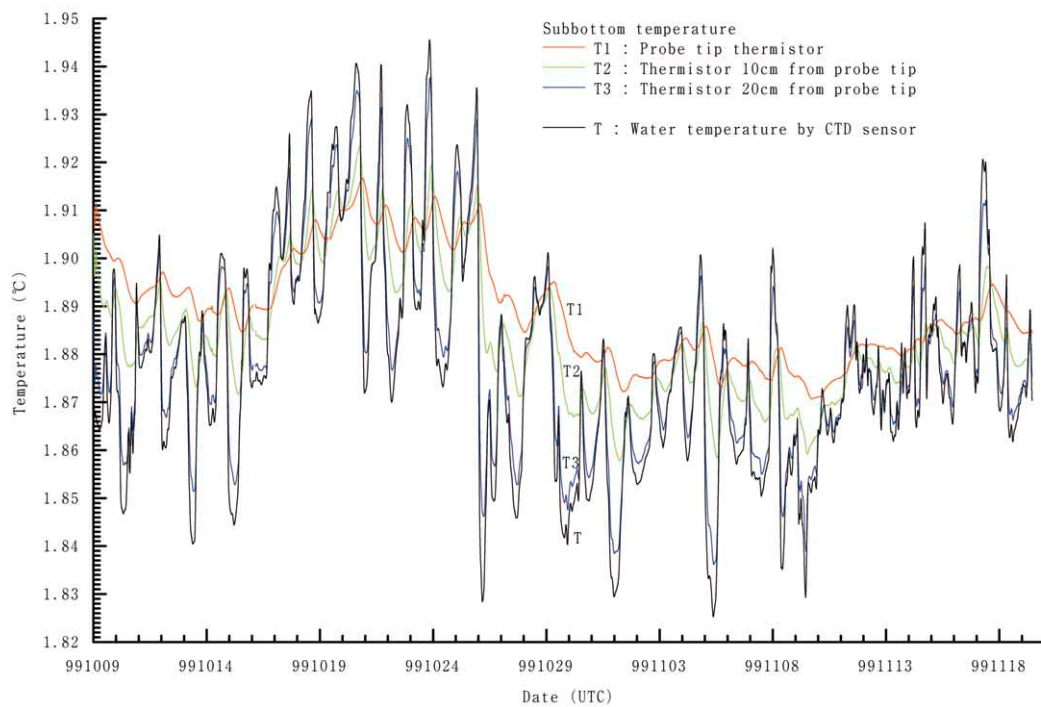


Fig. 11 Records obtained by the multi-sensor system.

(b) Sea-water current at the bottom estimated by the measurement by electromagnetic current meter for NS and EW components. Note: there are some offset due to no- absolute level calibration. (c) Sub-bottom temperature data for three probes at 0 cm, 10cm and 20 cm below the sediments compared to CTD temperature.

ACKNOWLEDGEMENTS

This project was supported by STA (Science and Technology Agency), Japan, and Earthquake Research Institute, University of Tokyo. We give greatly thanks JAMSTEC for their kind assistances during the field operation by R/V *Kaiyo*, ROV *Kaiko-10K*, manned submersible *Shinkai 6500* and ROV *Dolphine 3K*. We also give our great thanks people of the KDD Co. Ltd., for their kind helps on deployment of the VENUS systems.

We express our great thanks KDDI Co. Ltd and KCS Co. Ltd for their great helps on the retrieval of the OBTS and some instruments.

REFERENCES

- H. Iitaka, T. Saito, T. Doi, H. Nakano, S. Sato, and Y. Fujinawa., Maneuverable and flexible deep ocean observation system by acoustic transmission, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 152-160, 2000.
- R. Iwase, K. Kawaguchi, and K. Mitsuzawa, Observation by Multi-sensor in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 142-147, 2000.
- J. Kasahara, ed., "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, pp.206, 2000.
- J. Kasahara, and T. Sato, Observation by the VENUS OBBS (Ocean Bottom Broadband Seismometer), in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 127-133, 2000.
- J.. Kasahara, H. Utada, and H. Kinoshita, GeO-TOC project- Reuse of submarine cables for seismic and geoelectric measurements, *J. Phys. Earth*, **43**, 619-628, 1995.
- J. Kasahara, H. Utada, T. Sato, and H. Kinoshita Submarine cable OBS using a retired submarine telecommunication cable: GeO-TOC program, *Phys. Earth Planet.Intr.*, **108**, 113-128, 1998a.
- J. Kasahara, T. Sato, H. Momma, and Y. Sirasaki, A new approach to geophysical real-time measurements on a deep-sea floor using decommissioned submarine cables, *Earth Planets Space*, **50**, 913-925, 1998b.
- J. Kasahara, Y. Shirasaki, and H. Momma, Multidisciplinary geophysical measurements on the ocean floor using decommissioned submarine cables: VENUS project, *IEEE J. Oceanic Eng.*, **25**, 111-120, 2000a.
- J. Kasahara, Y. Shirasaki, K. Kawaguchi, R. Iwase and T. Nakatsuka, A new era of observations: Real-time multi-disciplinary observation at the ocean floor using submarine cables, *J. Geography*, **109**, 827-840, 2000b.
- A. Katsumada, M.Takahashi, S. Odaka, Y. Ohara, H. Itoh, M. Okasa, K. Nakamura and M. Nakamural, Study on the development of the tsunami observation system by use of a precise bottom pressure sensor, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project", 165-170, 2000.
- KDD, Special issue on the Trans Pacific Cable-2, *KDD Technical Jour.*, **88**, 3-75, 1976.
- H. Kinoshita, Cable-connected submarine environment monitor system, in *Proceedings of International Workshop on Scientific Use of Submarine Cables*, 119-125, Okinawa, Japan, 1997
- J. Kojima, . Kato, and Y. Shirasaki, Development of the bottom telemetry system, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 67-73, 2000.
- Y. Nagaya, Observation with seafloor acoustic ranging system linked to submarine telecommunication cable, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 148-151, 2000.
- S. Nagumo, and D. A. Walker, Ocean bottom geoscience observation: Reuse of transoceanic telecommunication cables, *EOS Trans. AGU*, **70**, 673-677, 1989.
- T. Nakatsuka, T. Miyazaki, Y. Ogawa, and S. Okumura, VENUS deep-sea geomagnetic and electrical filed observation at the Okinawa site, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 134-141, 2000.
- K. Watanabe, Observation by the hydrophone array, in "*Final Report of the VENUS Project*", Steering Committee of the VENUS Project, 123-126, 2000.
- S. C. Webb, Broadband seismology and noise under the ocean, *Rev. Geophysics and Space Phys.*, **36**, 105-142, 1998.

(Manuscript received 2 February 2001)