

## MIRAI MR18-01C Expendable Conductivity-Temperature-Depth Profiler (XCTD)

Last Modified: 2020-02-29

[ReadMe](#) [Observation Data](#) [Data Format](#)

Cruise ID: [MR18-01C](#)

Expendable Conductivity-Temperature-Depth Profiler (XCTD): Processed (DMO)-QCed

Data Policy: [JAMSTEC](#)

Observation Items: Depth, Temperature, Salinity

Science Keywords:

OCEANS > OCEAN TEMPERATURE > WATER TEMPERATURE

OCEANS > SALINITY/DENSITY > SALINITY

Cruise Report

[http://www.godac.jamstec.go.jp/catalog/data/doc\\_catalog/media/MR18-01C\\_all.pdf](http://www.godac.jamstec.go.jp/catalog/data/doc_catalog/media/MR18-01C_all.pdf)

### For Using Data

#### Principal Investigator

Data Management Office

#### Use Constraints

See [Terms and Conditions](#) about constrain of use.

#### Data Citation

See [Terms and Conditions](#) about data citation.

### Instrument

Instrument:

Expendable conductivity temperature depth measurements (XCTD) (MR11-04 -)



Instrument:

Expendable conductivity temperature depth measurements (XCTD) (- MR11-E02)



### Overview

Using XCTD (eXpendable Conductivity Temperature Depth profiler) system, the vertical distribution of water temperature and salinity are observed during free fall of its probe part in the seawater. Observed temperature and conductivity are transmitted to the data processor on board by the digital signal. The digital signal is converted to the temperature, conductivity and depth by data processor as binary data. Binary data is transmitted from data processor to PC. The PC calculates salinity from temperature, conductivity and depth, and those properties are recorded in PC as the ASCII files.

### System

#### (1) Launcher

Hand launcher

Manufacturer : Sippican, Inc.

Operation area : Rear upper deck

Automatic launcher

Manufacturer : Tsurumi Seiki Co., LTD.

Location : Port side of rear upper deck (4m from the sea level). The control panel is installed in the investigation room.

#### (2) Converter

Manufacturer : Tsurumi Seiki Co., LTD.

Location : Investigation room

Sampling rate : 40 msec

#### (3) XCTD probe specifications

Probe Type	TSK XCTD-1	TSK XCTD-2	TSK XCTD-3	TSK XCTD-4
Temperature range [deg-C]	-2 to 35			
Temperature accuracy [deg-C]	+/- 0.02			
Temperature resolution [deg-C]	0.01			
Conductivity range [mS/cm]	0 to 60			
Conductivity accuracy [mS/cm]	+/- 0.03			
Conductivity resolution [mS/cm]	0.015			
Measurement depth [m]	1000	1850	1000	1850
Depth accuracy [m]	5 or +/- 2% of depth; whichever is larger			
Maximum elapsed time [sec]	300	600	200	502
Rated ship speed [knot]	12	3.5	20	6

Since XCTD carries no pressure sensor, we need to estimate depth from the elapsed time. The fall-rate equation is as follows.

$$Z = at + 10E^{-3} + bt^2$$

Where Z(m) is the depth and t(sec) is the elapsed time.

In addition, coefficients of the fall-rate equation are different by probe types.

Probe Type	TSK XCTD-1	TSK XCTD-2	TSK XCTD-3	TSK XCTD-4
Coefficient-a	3.42543	3.43898	5.07598	3.68081
Coefficient-b	-0.47	-0.31	-0.72	-0.47

\* Coefficients listed above are supplied by Sippican, Inc., in USA.

The list of an XCTD type used in each cast is as follows.

Cast name	Probe Serial No.	Probe Type	Launcher	Converter
201801250824	17024859	XCTD-4	Auto	MK-150N
201802012053	14035995	XCTD-4	Auto	MK-150N

#### Data processing

(1) For sensor's stability, values of less than 1 m for temperature and less than 3 m for salinity are replaced by missing values, respectively, based on manufacturer's recommendation.

(2) Quality control

QCed data were added flag according to the NODC (National Oceanographic Data Center) quality control procedure.


- 1) The gradient check of adjacent depth data
- 2) The density inversion check
- 3) The broad range check set up at given ocean space and depth

Please see the site of NODC of the following link for quality control procedure in detail.

[QUALITY CONTROL AND PROCESSING OF HISTORICAL OCEANOGRAPHIC TEMPERATURE, SALINITY, AND OXYGEN DATA](#)

In addition, an abnormal value is identified by a visual check, and the data after visual QC is released.

#### Related Information



[Enlarge Image](#)

#### MR18-01C

Ship Name: MIRAI  
 Period: 2018-01-22 - 2018-02-05  
 Chief Scientist: Toshiya Kanamatsu (JAMSTEC)  
 Project Name: [Research project for earthquake and disaster prevention in the wide area around the Nankai Trough]  
 Proposal Title: Research Project for Compound Disaster Mitigation on the Great Earthquakes and Tsunamis around the Nankai Trough Region

#### Update History

2020-02-29 An observation data was registerd.

#### JAMSTEC

Site Policy  
 Privacy Policy  
 Application for Data and Samples  
 Data Policy  
 What's New  
 Update History  
 Feeds

Lists  
 Publication List  
 Amount of Public Info.  
 Data  
 Map Search  
 Data Tree  
 Detailed Search

Information of the Ships  
 NATSUSHIMA  
 KAIYO  
 YOKOSUKA  
 MIRAI  
 KAIREI  
 CHIKYU  
 KAIMEI  
 SHINSEI MARU  
 HAKUHO MARU

Information of the Submersibles  
 KAIKO  
 SHINKAI 2000  
 SHINKAI 6500  
 DEEP TOW  
 HYPER-DOLPHIN  
 URASHIMA  
 YOKOSUKA DEEP TOW  
 6K Camera DEEP TOW  
 6K Sonar DEEP TOW  
 KM-ROV  
 POWER GRAB SAMPLER (SHELL)  
 POWER GRAB SAMPLER (CLOW)  
 BMS

#### Go to a Cruise Information

Cruise ID:

#### Go to a Dive Information

Dive ID:

## MIRAI MR18-01C Expendable Conductivity-Temperature-Depth Profiler (XCTD)

Last Modified: 2020-02-29

[ReadMe](#) [Observation Data](#) [Data Format](#)

Cruise ID: [MR18-01C](#)

Expendable Conductivity-Temperature-Depth Profiler (XCTD): Processed (DMO)-QCed

Data Policy: [JAMSTEC](#)

### XCTD DMO

#### Format Description for the Corrected Data

Provided in the Exchange Format of CCHDO (CLIVAR and Carbon Hydrographic Data Office). Please see the following link for details of Exchange Format.

[CCHDO | CLIVAR & Carbon Hydrographic Data Office](#)

Data in following cruise is not expressed with Exchange Format. Please see the site of each cruise for format.

MR02-K05 Leg1

MR04-05

#### Format Description for the QCed Data

Each data file contains one line header (meta data) followed by data lines for each cast.

The number of data lines are recorded in the header.

Header part

No.	Column	Content	Format	Remarks
1	1	Header ID	a1	fixed as '#'
2	3 - 6	Data ID	a4	XCTD
3	8 - 22	Cruise ID	a15	
4	33 - 40	Date	i8	YYYYMMDD (UTC)
5	42 - 45	Time	i4	hhmm (UTC)
6	47 - 55	Latitude	i2,a1,f5.2,a1	dd-mm.mmN(S)
7	57 - 66	Longitude	i3,a1,f5.2,a1	ddd-mm.mmE(W)
8	68 - 71	Number of data lines	i4	
9	72 - 73	Terminator	-	CR+LF

Data part

No.	Column	Content	Unit	Format	Remarks
1	1 - 11	Depth	m	f11.1	
2	12 - 22	Temperature	deg-C	f11.2	ITS-90
3	23 - 33	Salinity	PSU	f11.3	PSS-78
4	45 - 55	Flag	-	i11	1 - 7 : space 8 : flag of depth 9 : flag of temperature 10 : flag of salinity 11 : space * reference : <a href="#">'Definition of Quality Control Flags'</a>
5	56 - 57	Terminator	-	-	CR+LF

Each contents of the data part is stored in 11 bytes.

Missing value is presented by '-5', and error value is presented by '-9'.

#### Definition of Quality Control Flags

##### 1. Depth Flags

- 0 - accepted value
- 1 - error in recorded depth ( same or less than previous depth )
- 2 - density inversion

##### 2. Observed Level Flags

- N - missing value
- 0 - accepted value
- 1 - range outlier ( outside of broad range check )
- 2 - failed inversion check
- 3 - failed gradient check
- 4 - zero anomaly
- 5 - failed combined gradient and inversion checks
- 6 - failed range and inversion checks
- 7 - failed range and gradient checks
- 8 - failed range and zero anomaly checks
- 9 - failed range and combined gradient and inversion checks
- A - failed visual check


QCed data were added flag according to the NODC (National Oceanographic Data Center) quality control procedure, additionally visually checked. Please see the site of NODC of the following link for quality control procedure.

[QUALITY CONTROL AND PROCESSING OF HISTORICAL OCEANOGRAPHIC TEMPERATURE, SALINITY, AND OXYGEN DATA](#)

#### Sample Program

[ex\\_read2.f](#)

#### Related Information



**MR18-01C**

Ship Name: MIRAI  
 Period: 2018-01-22 - 2018-02-05  
 Chief Scientist: Toshiya Kanamatsu (JAMSTEC)  
 Project Name: [Research project for earthquake and disaster prevention in the wide area around the Nankai Trough]  
 Proposal Title: Research Project for Compound Disaster Mitigation on the Great Earthquakes and Tsunamis around the Nankai Trough Region

**Update History**

2020-02-29	An observation data was registerd.
------------	------------------------------------

**JAMSTEC**  
 Site Policy  
 Privacy Policy  
 Application for Data and Samples  
 Data Policy  
 What's New  
 Update History  
 Feeds

**Lists**  
 Publication List  
 Amount of Public Info.  
**Data**  
 Map Search  
 Data Tree  
 Detailed Search

**Information of the Ships**  
 NATSUSHIMA  
 KAIYO  
 YOKOSUKA  
 MIRAI  
 KAIREI  
 CHIKYU  
 KAIMEI  
 SHINSEI MARU  
 HAKUHO MARU

**Information of the Submersibles**  
 KAIKO  
 SHINKAI 2000  
 SHINKAI 6500  
 DEEP TOW  
 HYPER-DOLPHIN  
 URASHIMA  
 YOKOSUKA DEEP TOW  
 6K Camera DEEP TOW  
 6K Sonar DEEP TOW  
 KM-ROV  
 POWER GRAB SAMPLER (SHELL)  
 POWER GRAB SAMPLER (CLOW)  
 BMS

**Go to a Cruise Information**  
 Cruise ID:

**Go to a Dive Information**  
 Dive ID:

Copyright 2011 Japan Agency for Marine-Earth Science and Technology

**JAMSTEC** 国立研究開発法人  
 海洋研究開発機構  
 JAPAN AGENCY FOR MARINE-EARTH SCIENCE AND TECHNOLOGY

**MIRAI MR18-01C Expendable Conductivity-Temperature-Depth Profiler (XCTD)**


Last Modified: 2020-02-29

[ReadMe](#) [Observation Data](#) [Data Format](#)

Cruise ID: **MR18-01C**  
 Expendable Conductivity-Temperature-Depth Profiler (XCTD): Processed (DMO)-QCed  
 Data Policy: **JAMSTEC**  
 Observation Items: Depth, Temperature, Salinity  
 Science Keywords:  
 OCEANS > OCEAN > WATER  
 TEMPERATURE TEMPERATURE  
 OCEANS > SALINITY/DENSITY > SALINITY

**Observation Map**

1. Clicking the icon displays a balloon with observation information.
2. Then click the observation name, figures will be displayed.

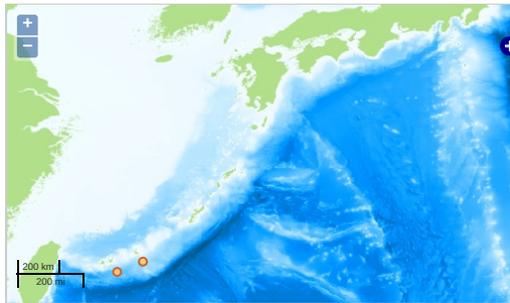


— ... Observation Line — ... Navigation ● ... Observation, Dive Point, Hole

**Figures**

201801250824



MR18-01C: 201801250824  
 Expendable Conductivity-Temperature-Depth Profiler (XCTD): Salinity

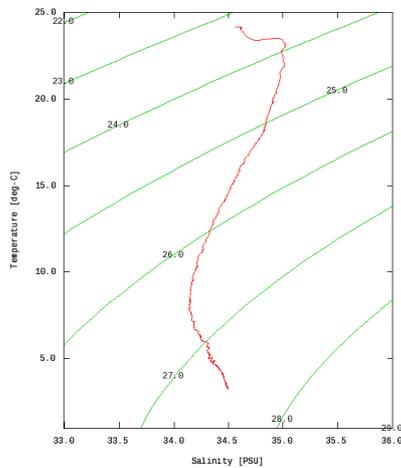

Only values evaluated as "good" : all flags are 0" are plotted in profiles.  
 Please see Format Page for the definition of quality flags.


**Data List**

- File names
- 201801250824.dat
- 201802012053.dat
- ex\_read2.f (Sample Program)

● Observation List  
 The list of observation is shown as follows.

Observation	Time and Date	Lat. [°]	Lon. [°]
201801250824	2018-01-25 08:25	24.4286	125.6106
201802012053	2018-02-01 20:55	23.9698	124.4721

**Related Information**



[Enlarge Image](#)

**MR18-01C**

Ship Name: MIRAI  
 Period: 2018-01-22 - 2018-02-05  
 Chief Scientist: Toshiya Kanamatsu (JAMSTEC)  
 Project Name: [Research project for earthquake and disaster prevention in the wide area around the Nankai Trough]  
 Proposal Title: Research Project for Compound Disaster Mitigation on the Great Earthquakes and Tsunamis around the Nankai Trough Region

**Update History**

2020-02-29 An observation data was registerd.

**JAMSTEC**

- [Site Policy](#)
- [Privacy Policy](#)
- [Application for Data and Samples](#)
- [Data Policy](#)
- [What's New](#)
- [Update History](#)
- [Feeds](#)

**Lists**

- [Publication List](#)
- [Amount of Public Info.](#)
- Data**
- [Map Search](#)
- [Data Tree](#)
- [Detailed Search](#)

**Information of the Ships**

- [NATSUSHIMA](#)
- [KAIYO](#)
- [YOKOSUKA](#)
- [MIRAI](#)
- [KAIREI](#)
- [CHIKYU](#)
- [KAIMEI](#)
- [SHINSEI MARU](#)
- [HAKUHO MARU](#)

**Information of the Submersibles**

- [KAIKO](#)
- [SHINKAI 2000](#)
- [SHINKAI 6500](#)
- [DEEP TOW](#)
- [HYPER-DOLPHIN](#)
- [URASHIMA](#)
- [YOKOSUKA DEEP TOW](#)
- [6K Camera DEEP TOW](#)
- [6K Sonar DEEP TOW](#)
- [KM-ROV](#)
- [POWER GRAB SAMPLER \(SHELL\)](#)
- [POWER GRAB SAMPLER \(CLOW\)](#)
- [BMS](#)

**Go to a Cruise Information**

Cruise ID:

**Go to a Dive Information**

Dive ID: