

## For Using Data


Data Policy	JURCAOS-JAMSTEC
Principal Investigator	Data Management Office
Use Constraints	See Terms and Conditions about constrain of use.
Data Citation	See Terms and Conditions about data citation.

## Quality

Raw

## Instrument

Shipboard gravimeter



Microgravimeter



## Measurement System

## 1) Shipboard gravity meter

The system consists of two main assemblies; the gyro-stabilized platform including the gravity sensor and the data handling & control system.

Manufacturer :	ZLS Corporation
Type :	ZLS Dynamic Gravity Meter with UltraSys Control System
Measurement range :	7,000 mGal
Accuracy :	1 mGal
Drift rate :	< 3.0 mGal/month
Location :	No.9 Laboratory

## 2) Portable gravity meter

The portable gravity meter consists of two modules; the data acquisition/control module and the gravity sensor module. The gravity sensor is enclosed in a thermostatically controlled vacuum chamber. The portable gravity meter is used to calculate the absolute gravity of the port with reference to the gravity station of the Japan Gravity Standardization Net of the Geographical Survey Institute of Japan.


Manufacturer :	SCINTREX
Model :	CG-5
Measurement range :	8,000 mGal
Standard deviation :	0.005 mGal
Drift rate :	< 0.02 mGal/day
Reference :	"CG-5 OPERATION MANUAL", SCINTREX

## About this data

We have no plan to process the data due to equipment failure etc.  
Please contact "dmo@jamstec.go.jp", if you wish to use the raw data.

## Related Information

---

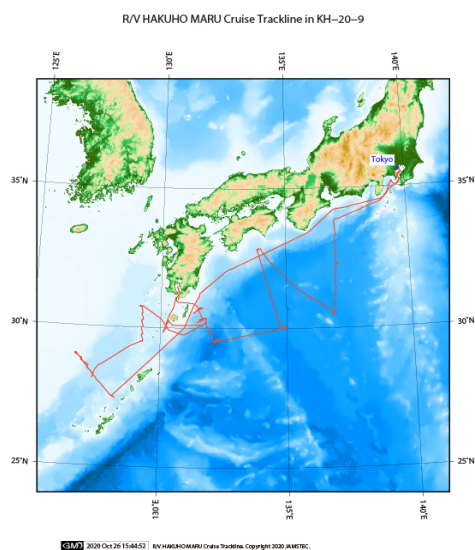

### KH-20-9

Ship Name:	HAKUHO MARU
Period:	2020/09/10 - 2020/10/05
Chief Scientist:	Hiroaki Saito (AORI, The University of Tokyo)
Proposal:	Study of the hotspots of nutrient supply in the Kuroshio region: For solving the Kuroshio Paradox